


2.4. Jácena sección rectangular (JR)

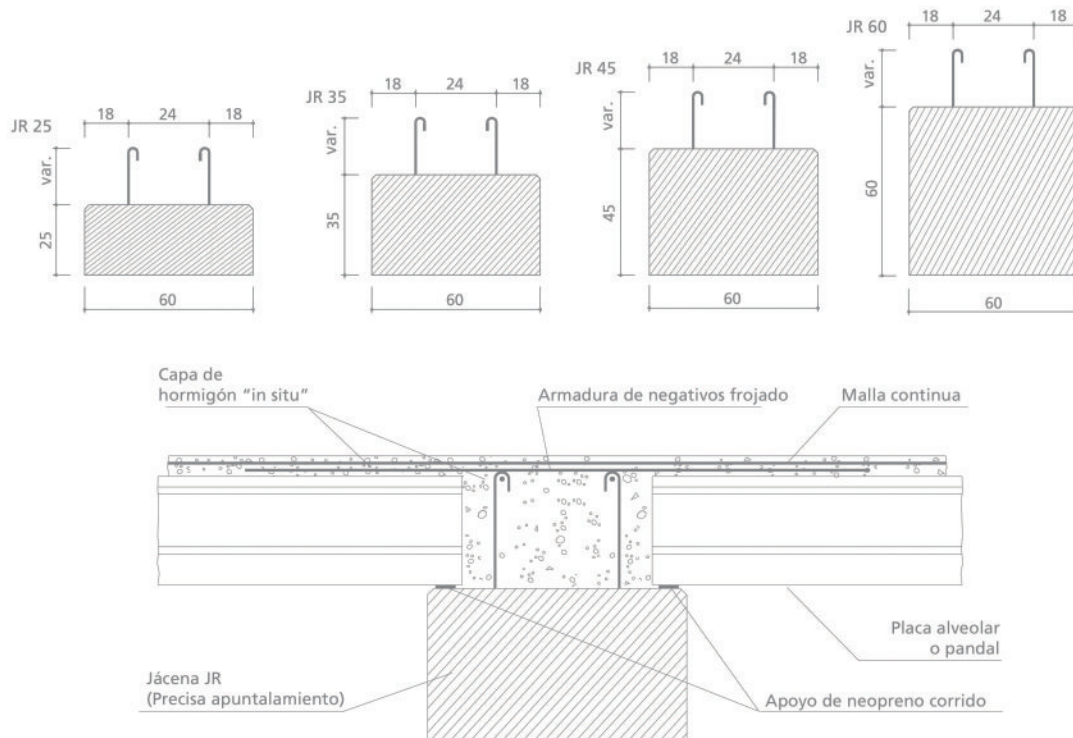

PLACA DE 20						
MODELO	CAPA DE COMPRESIÓN 5 cm			CAPA DE COMPRESIÓN 10 cm		
	sc=4,0 kN/m ²	sc=6,0 kN/m ²	sc=8,0 kN/m ²	sc=10,0 kN/m ²	sc=15,0 kN/m ²	sc=20,0 kN/m ²
JR 6025	6,00 (280)	5,90 (330)	5,70 (370)	5,20 (460)	4,90 (500)	4,60 (500)
JR 6035	8,10 (520)	7,90 (620)	7,40 (660)	6,80 (820)	6,20 (820)	5,80 (820)
JR 6045	9,60 (750)	9,20 (850)	8,60 (890)	7,70 (1070)	7,00 (1070)	6,60 (1170)
JR 6060	12,50 (1320)	11,40 (1350)	10,70 (1410)	9,40 (1620)	8,60 (1620)	8,00 (1620)

PLACA DE 25						
MODELO	CAPA DE COMPRESIÓN 5 cm			CAPA DE COMPRESIÓN 10 cm		
	sc=4,0 kN/m ²	sc=6,0 kN/m ²	sc=8,0 kN/m ²	sc=10,0 kN/m ²	sc=15,0 kN/m ²	sc=20,0 kN/m ²
JR 6025	5,40 (280)	5,30 (330)	5,20 (370)	4,80 (460)	4,80 (560)	4,60 (560)
JR 6035	7,30 (520)	7,20 (620)	6,90 (680)	6,30 (830)	6,00 (880)	5,80 (880)
JR 6045	8,70 (750)	8,50 (880)	8,10 (980)	7,40 (1160)	6,90 (1180)	6,60 (1180)
JR 6060	11,40 (1320)	10,70 (1440)	10,00 (1510)	9,00 (1740)	8,30 (1740)	8,00 (1740)

PLACA DE 30						
MODELO	CAPA DE COMPRESIÓN 5 cm			CAPA DE COMPRESIÓN 10 cm		
	sc=4,0 kN/m ²	sc=6,0 kN/m ²	sc=8,0 kN/m ²	sc=10,0 kN/m ²	sc=15,0 kN/m ²	sc=20,0 kN/m ²
JR 6025	4,90 (280)	4,90 (330)	4,80 (370)	4,40 (460)	4,60 (560)	4,70 (560)
JR 6035	6,70 (520)	6,60 (620)	6,40 (680)	6,00 (830)	6,00 (980)	5,80 (980)
JR 6045	8,00 (750)	7,90 (910)	7,60 (980)	7,00 (1200)	6,80 (1270)	6,60 (1270)
JR 6060	10,60 (1320)	10,20 (1540)	9,30 (1510)	8,70 (1880)	8,20 (1880)	8,00 (1880)

Entre paréntesis se indica el momento máximo (m-kN) para dicho caso.

Resistencia al fuego: los de serie son todos, como mínimo, R 60, pero todos pueden mejorar a R 90 ó R 120 añadiendo cordones.

2.4. Jácena sección rectangular (JR)

NUDO RÍGIDO EN CABEZA DE PILAR

